

# LED LumenTask™ UNDERCABINET LIGHTING

## DIRECT WIRE UNDERCABINET LIGHTING SPECIFICATION SHEET - 120V LED

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact Phone: \_\_\_\_\_

### PRODUCT DESCRIPTION

LumenTask 120V LED undercabinet lighting fixtures with 3200K LED diodes and integrated LED power supply that delivers maximum light output along with 50,000 hour life. The unique housing features an Open Wide™ hinged system that affords hands-free maintenance. LumenTask is rapidly becoming the preferential undercabinet lighting system for residential lighting applications, and is now available in energy-saving LED.

### PRODUCT SPECIFICATIONS

**Housing Construction:** One-piece, low profile (1-3/8" height) die-formed 18 gauge cold rolled steel housing with die cast end caps. Mounting holes with pre-affixed screws for easy alignment and installation. Multiple vents for cool under-cabinet operation. White, bronze, powder coat paint and solid stainless steel finish.

**Electrical:** Wire mold knock-outs on end caps for through wiring wiring (utilizing LumenTask EZ Connectors) of multiple units. Hi-low-off switch. 50,000 hr. lamp life at 3000°K\*.

**Dimming:** Non-dimmable.

**Diffuser:** Tempered prismatic frosted glass lens that slides in for easy installation. Spring loaded retention clip holds lens securely in place.

**Installation:** Must be installed a minimum of 2" from back of cabinet to allow for proper ventilation.

**Label:** ETL listed.

### OPEN WIDE FEATURE

Accessing the interior of LumenTask without dismounting is easy. Our Open Wide design keeps the fixture open and your hands free to wire. By simply pressing the wire compartment holding tab, the wiring compartment cover swings down and out, and stays in position until you're ready to snap it back in its closed position, and slide the lens back in place.

\*Kelvin temp (color) ±200K

### PRODUCT SPECIFICATION NUMBERS

Catalog No.	Fixture Wattage*	LED Wattage	Finish	Length
UCLED-8-WH	11W	2.33W	White	8"
UCLED-8-BZ	11W	2.33W	Bronze	8"
UCLED-8-SS	11W	2.33W	Stainless Steel	8"
UCLED-16-WH	17W	2.13W	White	16"
UCLED-16-BZ	17W	2.13W	Bronze	16"
UCLED-16-SS	17W	2.13W	Stainless Steel	16"
UCLED-24-WH	24W	2.15W	White	24"
UCLED-24-BZ	24W	2.15W	Bronze	24"
UCLED-24-SS	24W	2.15W	Stainless Steel	24"

\*Total wattage includes power supply


### LUMEN OUTPUT

8" LED LumenTask	Low	101 lumens
	High	189 lumens
16" LED LumenTask	Low	163 lumens
	High	300 lumens
24" LED LumenTask	Low	232 lumens
	High	428 lumens

### ACCESSORIES

Catalog No.	Description
EZ-1	EZ connector (connects two fixtures)
EZ-3	3" interconnect modular cable
EZ-6	6" interconnect modular cable
EZ-12	12" interconnect modular cable
CP-6	6' modular cord and plug for wall outlet
JB-1	Junction box - 4 knock-outs 4"L x 2"W x 1-5/8"H

NOTE: All EZ connectors are three wire.

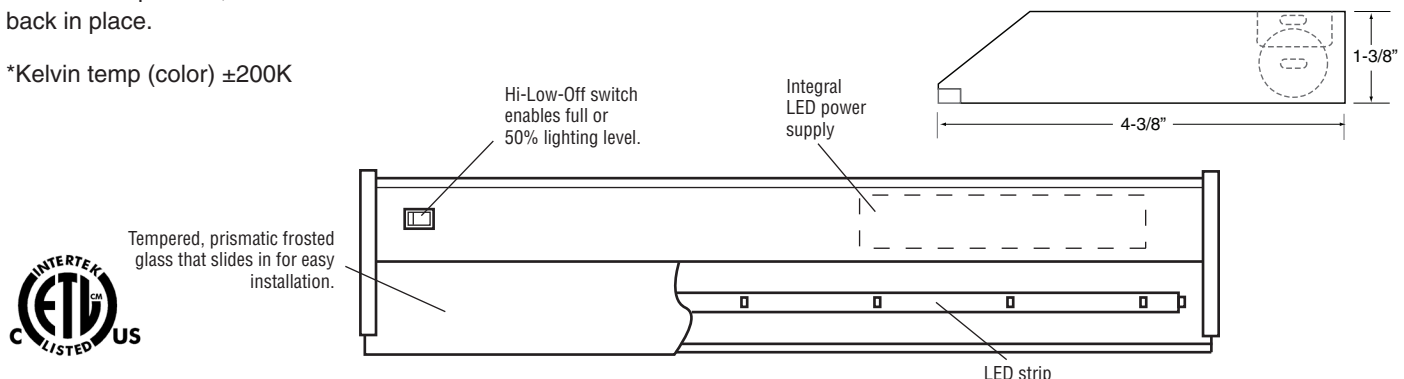

**GMLighting**

9830 W. 190th Street • Unit F • Mokena, IL 60448 • [www.gmlighting.net](http://www.gmlighting.net)

Toll-Free: (866) 671-0811 FAX: (708) 478-2640

e-mail: [gmlightingllc@sbcglobal.net](mailto:gmlightingllc@sbcglobal.net) • Specifications subject to change without notice. Patent pending  
ledlumentask\_042110